

尼龍具有吸濕性，會吸潮吸濕，也會丟失水分。要保證最佳使用性能，材料務必保持2.5%的含水量。旭泰電氣的包裝可保持材料的含水量。庫存維持扎帶的原包裝有利于扎帶質量保持。不恰當得儲存，尤其是處於乾燥或寒冷的環境，可以導致水分丟失，并影響扎帶的使用。包裝一旦打開，袋內扎帶應盡快用完。

## Nylon products


Nylon is hygroscopic, it will absorb moisture, and lose the moisture too. To ensure optimum performance, the material must maintain a 2.5% water. SBS packaging may keep the moisture. In order to keep the quality, it's better to remain the original packaging for inventories. If stored improperly especially in dry or cold environment, it will lose water from cable ties, and impact the use of cable ties. Once the package is opened; please use out the cable ties as soon as possible.

### 以下是我們對於扎帶儲存的建議：Here are our suggestion for the cable tie store:

不要暴露或把扎帶放置於陽光直接照射的環境  
Do not expose or place the cable ties in direct sunlight environment;

不要暴露或把扎帶放置於直接熱源附近  
do not expose or placed the cable tie near direct heat:

扎帶儲存的最佳溫度如下  
the ideal temperature to store the cable tie:

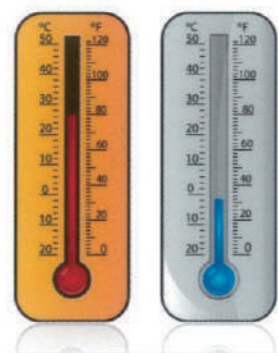

安徽旭泰电气有限公司  
ANHUI XUTAI ELECTRIC CO., LTD

# 企业产品目录

## ENTERPRISE PRODUCT CATALOGUE



### 专业的扎带/配线器材供应商

NYLON CABLE TIES, WIRING ACCESSORIES  
ELECTRICAL CONNECTOR

## 专业的扎带/配线器材供应商

### 安徽旭泰电气有限责任公司

地址：安徽省亳州市谯城区古井镇  
电话：0558-5888305  
传真：0558-5888305  
网址：<http://www.chinaxut.com>  
邮箱：[yang@xtcabletle.com](mailto:yang@xtcabletle.com)


### Anhui xutai Electric Co., Ltd

ADD: Gujing Town, Qiaocheng District, Bozhou City, Anhui  
Tel: 0558-5888305  
Fax: 0558-5888305  
Web: <http://www.chinaxut.com>  
E-mail: [yang@xtcabletle.com](mailto:yang@xtcabletle.com)

ANHUI XUTAI ELECTRIC

我公司產品通過TUV CE SGS ROHS REACH檢測機構認證

Our products are certified by TUV CE SGS ROHS REACH testing agency.

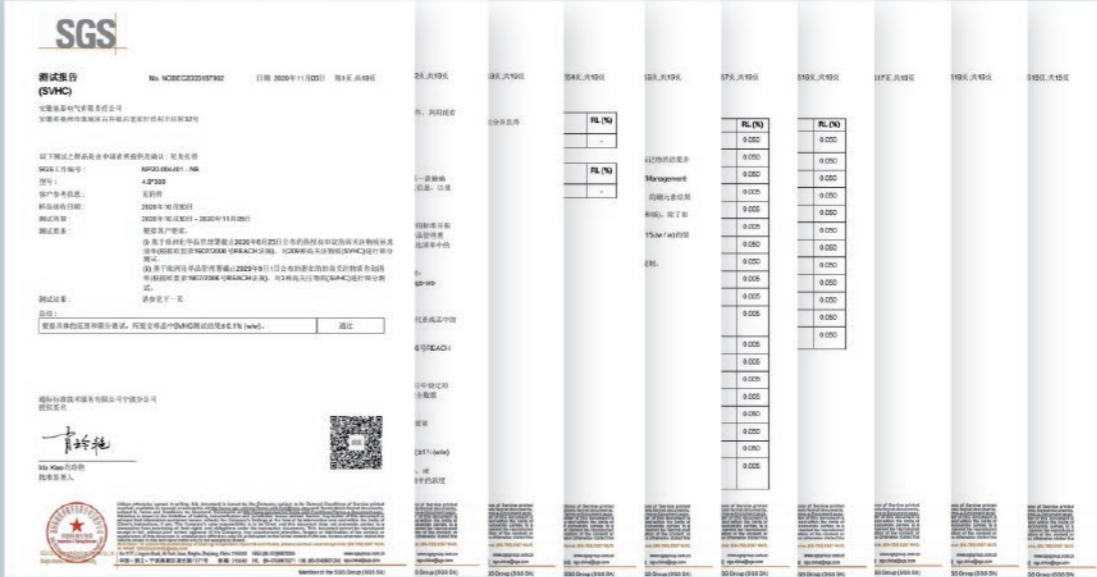

Standing On the Start Point of Success,  
**WE WORK HARD**  
 FOR WARD TO OUR BRILLIANT FUTURE!

■ 站在成功的起點上，懷着對未來無限憧憬！



安徽旭泰电气有限公司  
 ANHUI XUTAI ELECTRIC CO., LTD



專業的扎帶/配線器材供應商  
 Professional tying / wiring equipment supplier

尼龍扎線帶 NYLON CABLE TIE

材質：採用UL認可之尼龍66料制成，防火等級94V-2，耐酸、耐蝕、絕緣性良好，不易老化、承受力強。  
顏色：標準顏色為本色（白色），另有抗紫外線之黑色，特殊顏色歡迎訂做。


Material: Nylon 66, 94V-2 certificated by UL. Heat-resisting, erosion control, insulate well and not apt to age.

Color: Natural( or white,standard color),UV black and other colors are available as requested.

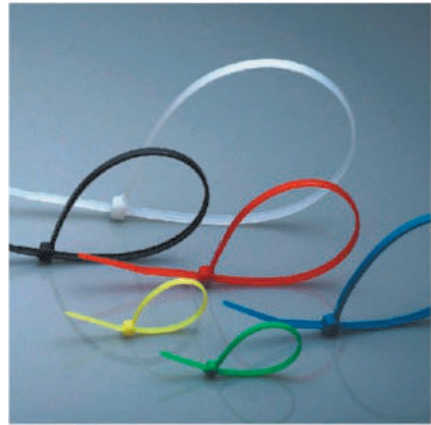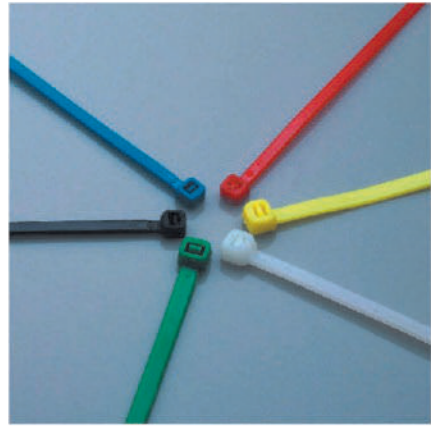

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH				
	INCH	MM			LBS	KGS			
XT-2.5×60	2.4"	60	2.5	2-11	18	8			
XT-2.5×80	3.2"	80		2-16					
XT-2.5×100	4.0"	100		2-22					
XT-2.5×120	4.7"	120		2-30					
XT-2.5×150	6.0"	150		2-35					
XT-2.5×160	6.3"	160		2-40					
XT-2.5×200	8.0"	200		3-50					
XT-3.6×100	4.0"	100		3.6			3-22	40	18
XT-3.6×120	4.7"	120					3-30		
XT-3.6×140	5.5"	140					3-33		
XT-3.6×150	6.0"	150	3-35						
XT-3.6×180	7.1"	180	3-42						
XT-3.6×200	8.0"	200	3-50						
XT-3.6×250	10"	250	3-65						
XT-3.6×280	11"	280	3-70						
XT-3.6×300	12"	300	3-80						
XT-3.6×370	14.6"	370	3-98						
XT-3.6×400	16"	400	3-105						
XT-3.9×200	8"	200	3.9	3-50	40	18			
XT-3.9×250	10"	250		3-65					
XT-3.9×300	12"	300		3-80					
XT-3.9×350	14"	350		3-90					
XT-3.9×400	16"	400		3-105					
XT-3.9×450	18"	450		3-130					
XT-4.1×500	20"	500	4.1	3-150	40	20			
XT-4.8×120	4.7"	120	4.8	3-30	50	22			
XT-4.8×160	6.3"	160		3-40					
XT-4.8×180	7.1"	180		3-42					
XT-4.8×200	8.0"	200		3-50					
XT-4.8×250	10"	250		3-65					
XT-4.8×280	11"	280		3-70					
XT-4.8×300	12"	300		3-80					
XT-4.8×350	14"	350		3-90					
XT-4.8×370	14.6"	370		3-98					
XT-4.8×380	15"	380		3-102					
XT-4.8×400	16"	400		3-105					
XT-4.8×450	17.7"	450		3-130					
XT-4.8×500	19.7"	500		3-150					
XT-4.8×550	21.6"	550		4-165					
XT-4.8×600	23.6"	600		8-170					
XT-4.8×650	25.6"	650		8-185					
XT-4.8×710	28"	710		8-195					

型號 ITEM NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM	承受力 TENSILE STRENGTH				
	INCH	MM			LBS	KGS			
XT-7.2×150	6.0"	150	7.2	3-35	120	55			
XT-7.2×200	8.0"	200		3-50					
XT-7.2×250	10"	250		4-65					
XT-7.2×280	11"	280		4-78					
XT-7.2×300	12"	300		4-80					
XT-7.2×350	14"	350		4-90					
XT-7.2×370	14.6"	370		4-98					
XT-7.2×380	15"	380		4-100					
XT-7.2×400	16"	400		4-105					
XT-7.2×450	18"	450		4-110					
XT-7.2×500	20"	500		4-150					
XT-7.2×550	21.6"	550		4-165					
XT-7.6×150	6.0"	150		7.6			4-35	120	55
XT-7.6×200	8.0"	200					3-50		
XT-7.6×250	10"	250	4-65						
XT-7.6×280	11"	280	4-78						
XT-7.6×300	12"	300	4-80						
XT-7.6×350	14"	350	4-90						
XT-7.6×370	14.6"	370	4-98						
XT-7.6×380	15"	380	4-100						
XT-7.6×400	16"	400	4-105						
XT-7.6×450	18"	450	4-110						
XT-7.6×500	20"	500	4-150						
XT-7.6×550	21.6"	550	4-165						
XT-7.6×710	28"	710	10-195						
XT-7.6×760	30.4"	760	10-225						
XT-9.0×350	14"	350	9.0	8-90	175	79.4			
XT-9.0×400	16"	400		8-105					
XT-9.0×450	18"	450		8-118					
XT-9.0×500	20"	500		8-150					
XT-9.0×550	21.6"	550		8-160					
XT-9.0×600	23.6"	600		8-170					
XT-9.0×650	25.6"	650		8-185					
XT-9.0×720	28.3"	720		10-195					
XT-9.0×800	31.5"	800		10-230					
XT-9.0×900	35.5"	900		10-265					
XT-9.0×1000	39.4"	1000		10-300					
XT-9.0×1100	43.3"	1100		10-335					
XT-9.0×1200	47.2"	1200		10-370					
XT-9.0×1300	51.2"	1300		10-410					
XT-9.0×1500	59.1"	1500	10-480						
XT-12×300	12"	300	12	14-80	250	114			
XT-12×600	23.6"	600		14-170					
XT-12×650	25.6"	650		14-185					
XT-12×700	28"	700		14-195					
XT-12×760	30.4"	760		14-225					
XT-12×900	25.5"	900		14-265					
XT-12×1000	39.4"	1000		14-335					

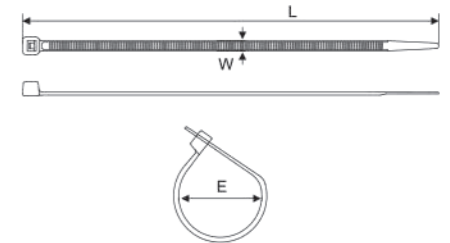

尼龍扎帶包裝款式A系列 PACKING OF SERIES A



規格 MM	外箱尺寸 CM	數量 BAG	內盒尺寸 CM	數量 BAG	毛/淨重 KG
2.5×60	47×42×32	600	40×22×31	300	12/10
2.5×80	47×44×32	600	42×22×31	300	13/11
2.5×100	47×42×32	500	40×22×32	250	15/13
2.5×120	47×44×32	500	42×22×31	250	20/18
2.5×150	53×48×35	500	46×25×34	250	24/22
2.5×160	53×48×35	500	46×25×34	250	25/23
2.5×200	43×42×32	250	40×22×31	125	16/14
3.6×140	47×42×32	250	40×22×31	125	17/15
3.6×150	47×44×32	250	42×22×31	125	18/16
3.6×200	47×44×32	200	42×22×31	100	18/16
3.6×250	51×48×30	200	46×24×29	100	22/20
3.6×280	47×42×32	150	40×22×31	75	22/20
3.6×300	47×44×32	150	42×22×31	75	23/21
3.6×370	47×44×32	100	42×22×31	50	19/17
4.8×120	47×44×32	200	42×22×31	100	18/16
4.8×160	43×42×32	150	40×22×31	75	17/15
4.8×180	47×42×32	150	42×22×31	75	17/15
4.8×200	47×44×32	150	42×22×31	75	18/16
4.8×250	43×42×32	100	40×20×31	50	18/16
4.8×280	47×42×32	100	40×22×31	50	21/19
4.8×300	47×42×32	100	40×22×31	50	22/20
4.8×350	47×44×32	100	40×22×31	50	24/22
4.8×380	51×48×30	100	46×24×29	50	26/24
4.8×400	52×49×32	100	40×23×31	50	28/26
4.8×430	54×49×32	100	52×23×31	50	29/27
4.8×450	56×49×32	100	54×23×31	50	30/28
4.8×500	60×34×25	50	58×16×24	25	17/15
7.2×150	47×44×32	100	42×22×31	50	15/13
7.2×200	51×48×30	100	46×24×29	50	21/19
7.2×500	43×42×32	50	40×22×31	25	16/14
7.2×300	47×42×32	50	40×22×31	25	17/15
7.2×350	47×44×32	50	42×22×31	25	21/19
7.2×380	51×48×30	50	46×24×29	25	22/20
7.2×400	54×47×32	50	52×22×31	25	23/21
7.2×450	56×49×32	50	54×23×31	25	25/23
7.2×500	60×32×25	25	58×15×24	12.5	14/13
7.2×550	65×32×25	25	63×15×31	12.5	15/13
9.0×400	54×49×32	30	52×23×31	15	23/21
9.0×450	58×42×25	20	56×20×24	10	19/17
9.0×500	60×40×25	20	58×19×24	10	20/18
9.0×550	65×40×25	20	63×19×24	10	21/19
9.0×600	70×34×15	10	68×16×14	5	13/11
9.0×650	75×34×15	10	73×15×14	5	14/12
9.0×700	80×34×15	10	78×16×14	5	15/13
9.0×750	85×34×15	10	83×16×14	5	16/14
9.0×800	90×34×15	10	88×16×14	5	17/15
9.0×900	100×34×15	10	98×16×14	5	19/17
9.0×1000	110×34×15	10	108×16×14	5	20/18
9.0×1100	120×34×15	10	118×16×14	5	22/20
9.0×1200	130×34×15	10	128×16×14	5	24/22
12×650	75×34×24	10	73×16×23	5	17/15
12×900	100×34×25	10	98×16×24	5	24/22

包裝款式B系列 PACKING OF SERIES B

1000PCS PACKING

ITEM NO.	B1-1000	
DETAIL	2.5×100MM 4"	400PCS
	3.6×130MM 6"	300PCS
	3.6×200MM 8"	200PCS
	3.6×300MM 12"	100PCS
MEAS	54×44×34CM	
QTY	20SETS/CTN (10SETS/INNER BOX) 6900 SETS/20' CONTAINER	
G.W/N.W	15/13KG	
KEEVE	DIA:Φ10CM,HEIGHT:31CM	



300PCS PACKING

ITEM NO.	B2-300	
DETAIL	2.5×100MM 4"	200PCS
	3.6×200MM 8"	100PCS
MEAS	41×41×48CM	
QTY	50SETS/CTN (25SETS/INNER BOX) 17300 SETS/20' CONTAINER	
G.W/N.W	12/10KG	
KEEVE	DIA:Φ7.5CM,HEIGHT:21CM	



200PCS PACKING

ITEM NO.	B3-200	
DETAIL	2.5×100MM 4"	100PCS
	2.5×150MM 6"	50PCS
	3.6×200MM 8"	50PCS
MEAS	42×31×48CM	
QTY	70SETS/CTN (35SETS/INNER BOX) 31300 SETS/20' CONTAINER	
G.W/N.W	10/8KG	
KEEVE	DIA:Φ5.5CM,HEIGHT:21CM	





包裝款式B系列 PACKING OF SERIES B

1200PCS PACKING

ITEM NO.	B4-1200	
DETAIL	2.5×100MM 4"	500PCS
	3.6×150MM 6"	200PCS
	4.8×200MM 8"	400PCS
	4.8×300MM 12"	100PCS
MEAS	63×38×33CM	
QTY	15SETS/CTN 5200 SETS/20' CONTAINER	
G.W/N.W	18/16KG	
KEEVE	DIA:Φ12CM,HEIGHT:31CM	

850PCS PACKING

ITEM NO.	B6-850	
DETAIL	2.5×100MM 4"	500PCS
	3.6×150MM 8"	300PCS
	4.8×200MM 12"	50PCS
MEAS	54×44×34CM	
QTY	20SETS/CTN (10SETS/INNER BOX) 6900 SETS/20' CONTAINER	
G.W/N.W	14/12KG	
KEEVE	DIA:Φ10CM,HEIGHT:31CM	

650PCS PACKING

ITEM NO.	B9-650	
DETAIL	2.5×100MM 4"	300PCS
	3.6×150MM 8"	200PCS
	4.8×200MM 8"	150PCS
MEAS	54×44×48CM	
QTY	40SETS/CTN (20SETS/INNER BOX) 9800 SETS/20' CONTAINER	
G.W/N.W	19/17KG	
KEEVE	DIA:Φ10CM,HEIGHT:31CM	

300PCS PACKING


ITEM NO.	B2-300	
DETAIL	2.5×100MM 4"	200PCS
	3.6×200MM 8"	100PCS
MEAS	41×41×48CM	
QTY	50SETS/CTN (25SETS/INNER BOX) 17300 SETS/20' CONTAINER	
G.W/N.W	12/10KG	
KEEVE	DIA:Φ7.5CM,HEIGHT:21CM	



雙扣式尼龍扎帶 DOUBLE LOCKING CABLE TIES

材質：採用UL認可尼龍66(黑色)料制成，防火等級94V-2，耐酸蝕，不易老化。  
特點：雙鎖式設計、承受力特強。  
Material: Nylon 66 94V-2 certified by UL. Acid-control and not easy to age.  
Usage: double locking, strong supporting capacity.


編號 ITEM .NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM	拉力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
XT-180DDL	7"	180	9.0	15-45	67	30
XT-260DL	10 1/4"	260	9.0	30-66	67	30
XT-350DL	13 5/8"	350	9.0	30-90	67	30

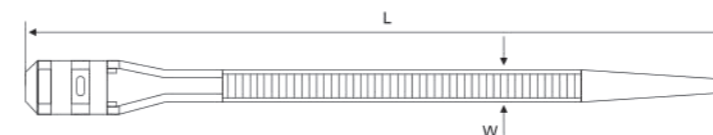

可鬆式扎線帶 RELEASABLE CABLE TIE

材質：UL合格之NYLON 66，防火等級94V-2，不易老化。  
特點：可再鬆開，重複使用。  
Material: Nylon 66 certified by UL.  
Usage: These ties, which are easily assembled by and with pliers, remain securely locked until intentionally released by operating the finger catch.

編號 ITEM .NO.	長L		寬W MM	最大捆扎範圍 E BUNDLE DIAMETER MM	拉力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
XT-5*200RT	6"	200	4.8	35	25	12
XT-8*150RT	8"	150	7.5	45	50	22
XT-8*200RT	10"	200	7.2	45	50	22
XT-8*250RT	12"	250	7.5	60	50	22
XT-8*300RT	10"	300	7.5	75	50	22
XT-8*400RT	15 3/4"	400	7.5	100	50	22
XT-8*450RT	19 11/16"	450	7.5	125	50	22
XT-8*500RT	20"	500	7.5	150	50	22





可鬆式扎帶  
規格齊全

固定頭式扎線帶 MOUNTABLE HEAD TIES

材質：UL認可之尼龍66料制成。  
特點：扎帶捆扎電綫後，將整束電綫用螺絲固定于基板上。  
Material: Nylon 66 certified by UL.  
Usage: after bundling wires, fix them on plate with screw

型號 ITEM NO.	長L		寬W MM	(最大) 捆扎範圍 MAX.BUNDLE DIA. MM	承受力 TENSILE STRENGTH		包裝 PACKING
	INCH	MM			LBS	KGS	
XT-100MH	4"	100	2.5	22	18	8.0	100PCS
XT-100MA	4"	100	3.6	22	40	18	
XT-150MH	6"	150		32			
XT-200MH	8"	200	4.8	42	50	22	
XT-300MH	12"	300	7.2	80	50	55	
XT-200MA	8"	200	7.2	50	120	55	
XT-350MA	14"	350	7.2	90	120	55	

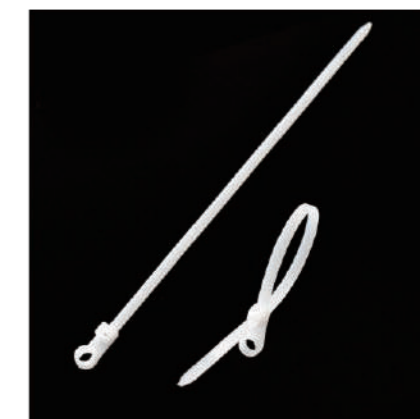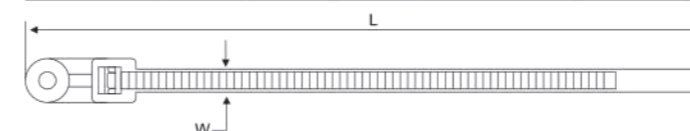

**尼龍不銹鋼嵌片扎帶  
NYLON STAINLESS STEEL INLAY BLOCK TIES**

**標準及特點**

尼龍扎帶技術性能完全符合IEC92-3-84標準和GB3126-82《船舶非金屬電纜扎帶》專業標準。扎帶使用環境溫度-25℃—60℃，抗拉強度符合標準要求。

**Standard and characteristic**

Nylon is it bring technical feature accord with IEC92-3-84 standard and GB3126-82" boat non-metal cable is it lead to pitch " professional standard totally to pitch. Pitching bringing environment temperature -25 degrees Centigrade — 60 degrees Centigrade of use,tensile strength accords with the standard request.

**材質及特點**

採用尼龍66材料制成，具有絕緣性能好，難燃性，操作方便，省工省本等特點。

**Material and characteristic**

Adopt 66 materials of nylon to make, insulating and of good performance, difficultfiring, easy to operate, the characteristics, such as one of worker's province in the province, etc.


規格 Specification	規格 Specification	規格 Specification
4.8×200	8×145	10×350
4.8×250	8×175	10×400
4.8×300	8×200	10×450
	8×240	10×500
	10×280	10×550
	10×300	10×610

**鋼釘線卡(包裝系列E) PACKING OF SERIES E**

型號 ITEM NO.	外箱尺寸 CM	數量 (100PCS/BAG) BAG/CTN	毛/淨重 KG
4mm	48×35×32	600	30/29
5mm		500	26/25
6mm		450	29/28
7mm		400	30/29
8mm		300	29/28
9mm		200	22/21
10mm		200	24/23
12mm		150	25/24
14mm	48×35×35	100	21/19
16mm		70	22/20
18mm		60	22/20
20mm		40	19/17
22mm		55×33×47	60
25mm	40		26/24

**卷式結束帶 SPIRAL WRAPPING BAND**

型號 ITEM NO.	規格 SIZE	包裝 PACKING	
XT-15A	Φ15mm	2.5m	10m
XT-20A	Φ20mm		
XT-25A	Φ25mm		
XT-30A	Φ30mm		

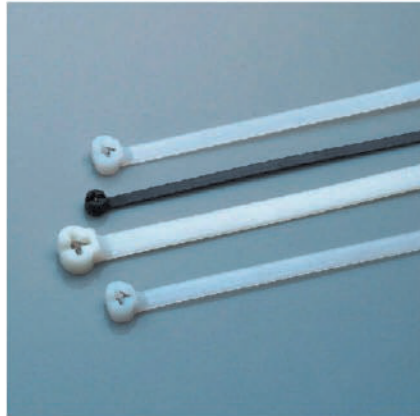

**尼龍電纜固定頭 NYLON CABLE GLAND**

材質：UL尼龍6/6，防火等級94V-2，夾緊圈為耐油橡膠材質

特點：1. 夾緊圈經特殊設計，拉力強，對電纜不造成損傷。

2. 不須將固定頭解體，電纜可直接穿入上緊即可，省時方便。

用途：一般機械控制箱、配電櫃、機器、電器等電纜固定用。


Material: UL Nylon 6/6;neoprene for seal insert,with nut

Color: Balck,gray,light gray

Protection:IP68

Temp.Resistance:-30℃ to 80℃;short time 140℃ suggested clearance hole for mon-threaded mouting.

規格 TYPE	規格 D1	規格 D1	規格 PITCH	規格 D2	規格 B1	規格 L1	規格 L2	規格 L3	適用範圍 CABLE RANGE	包裝 PACKING
XT-7	PG-7	12.1	1.5	8.0	6.0	8.0	12.8	13.4	3.5~6	50PCS
XT-9	PG-9	14.3		9.9	7.0	8.1	13.9	15.2	4~8	
XT-11	PG-11	18.23		13.2	9.6	8.2	15.4	18.3	5~10	
XT-13.5	PG-13.5	19.9		15.2	11.7	8.9	15.8	18.9	6~12	
XT-16	PG-16	22.1		17.2	12.9	8.9	17.3	19.7	10~14	
XT-21	PG-21	27.5		22.4	16.5	10.8	18.6	23.9	13~18	
XT-29	PG-29	36.2	1.5	30.6	23.2	10.9	20.5	27.4	18~25	25PCS
XT-36	PG-36	46.7	1.5	35.2	33.3	14.4	24.4	30.5	22~32	10PCS
XT-42	PG-42	52.2		39.3	39.6	14.6	25.4	31.6	30~38	
XT-48	PG-48	57.6		45.4	45.1	15.8	25.2	31.3	34~44	

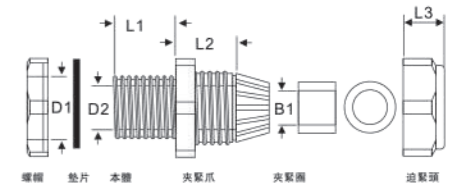

**卷式纏繞帶 SPIRAL WRAPPING BAND**

材質：採用PP料制成。

使用方法：先用保護帶固定起點一端，然後按順時針方向環繞束緊，即可將電纜束為一體。


用途：作為保護電纜不受磨損及絕緣用，并可改進電纜彎曲的美觀。

Material: Made from PE.

Usage: Fix one end with safety belt first, then circle the wires clock wise to make them tighen.

Application: a protection wear for electric wires, and make them insulation and look nice.

型號 ITEM NO.	內徑 D	外徑 D1	螺距 W	結束可能範圍 WRAPPING RANGE (MMΦ)	包裝 PACKING
XT-6	4	6	7.0	4×50	10m
XT-8	6	8	10.8	6×60	
XT-10	7.5	10	11.4	7.5×60	
XT-12	9	12	13.9	9×65	
XT-16	13	16	15.0	12×70	
XT-20	16	20	18.2	15×100	
XT-25	21	25	19.6	20×130	



**雙頭尼龍束線帶(不可退式)**

材質：採用UL認可之尼龍66料制成，防火等級94v-2，不易老化承受力強。

特點：雙扣式設計承受力特強。

**Double Head Cable Tie**

Material:Nylon 12 or Nylon 66 certificated by UL.

Usage:double locking strong supporting capacity.

編號 ITEM NO.	長L		寬W MM	D1		D2		拉力 TENSILE STRENGTH	
	INCH	MM		MAX	MIN	MAX	MIN	LBS	KGS
XT-5*225MT	8 7/8"	225	4.8	59	2.5	52	2	50	22
XT-5*250MT	10"	250	4.8	75	2.5	65	2	50	22
XT-5*300MT	11 7/8"	300	4.8	83	2.5	78	2	50	22
XT-5*370MT	14 9/16"	370	4.8	105	2.5	98	2	50	22



### 不銹鋼扎帶

材質：採用不銹鋼201,304,316材質，各種長度皆可制作，特殊規格按客戶供樣制作；  
特性：耐酸、耐腐蝕、抗張强度高，使用簡單，快捷等優勢；  
工作溫度範圍：-40℃~150℃

### Stainless Steel Cable Ties


**Material:**Stainless steel type: 201,304,316, all length are available, special sizes can be customized;  
**SBaracteristic:**Acid-resisting, anti-corrosion, high tensile strength, simple and easy to use, etc.  
**Working temperature:**-40℃~150℃



型號 ITEM NO.	L (長) mm	W (寬) mm	(最大)捆扎範圍 Max.bundle Dia. (mm)	拉力 Tensile Strength	
				LBS	KGS
SST-100	100	4.6	22	135	60
SST-152	152	4.6	35	135	60
SST-175	175	4.6	40	135	60
SST-200	200	4.6	50	135	60
SST-250	250	4.6	65	135	60
SST-300	300	4.6	80	135	60
SST-360	360	4.6	95	135	60
SST-400	400	4.6	105	135	60
SST-520	520	4.6	150	135	60
SST-600	600	4.6	180	135	60
SST-680	680	4.6	195	135	60
SST-840	840	4.6	250	135	60
SST-1050	1050	4.6	285	135	60
SHD-152	152	7.9	35	180	80
SHD-175	175	7.9	40	180	80
SHD-200	200	7.9	50	180	80
SHD-250	250	7.9	65	180	80
SHD-300	300	7.9	80	180	80
SHD-360	360	7.9	95	180	80
SHD-400	400	7.9	105	180	80
SHD-520	520	7.9	150	180	80
SHD-600	600	7.9	180	180	80
SHD-680	680	7.9	195	180	80
SHD-840	840	7.9	250	180	80
SHD-1050	1050	7.9	285	180	80
SED-152	152	12	35	270	120
SED-175	175	12	40	270	120
SED-200	200	12	50	270	120
SED-250	250	12	65	270	120
SED-300	300	12	80	270	120
SED-360	360	12	95	270	120
SED-400	400	12	105	270	120
SED-520	520	12	150	270	120
SED-600	600	12	180	270	120
SED-680	680	12	195	270	120
SED-840	840	12	250	270	120
SED-1050	1050	12	285	270	120

### HT扎帶固定座 CABLE TIE HOLDER

ITEM. NO.	H	H1	W	L	L1	PACKING
XT-6	31	6.0	8.0	12.7	9.7	100PCS
XT-8	37	6.0	10	12.7	9.7	100PCS



### 粘式扎線固定座 CABLE TIE MOUNTS

材質：採用UL認可之ABS，尼龍66制成，防火等級94V-2。背附進口面海膠，絕緣性能良好、耐久性、不易老化。

使用方法：將定位片背面雙面膠撕開，貼于機板固定，再用扎帶捆扎電線。

用途：省時、簡便、供面板不可以鑽孔時使用。


**Material:** UL approved Nylon 66,94V-2, with imported adhesive sticker. Good insulation, long lasting and uneasy to age.

**How to use:**Remove the cover of the adhesive and stick the piece properly, then put in cable tie for using.

**Application:** Used where hole-drilling is not allowed. easy and time-saving.



型號 ITEM NO.	長×寬 L×W (MM)	高H MM	帶孔T MM	外箱尺寸 CM	數量 PCS/CTN	毛重/淨重 KG
XT-20	20×20	6.1	5.0	52×35×36	20000	20/18
XT-25	25×25	7.5	6.2	52×35×36	10000	19/17
XT-30	30×30	8.7	6.4	54×33×32	6000	18/16
XT-40	40×40	6.4	10.8	54×33×32	3000	17/15



### 扎線固定座 SADDLE TYPE TIE MOUNTS

材質：UL合格之NYLON 66 (本色)，防火等級94V-2。


用途：先將固定座以螺絲固定，再以扎線帶繞綁電纜，馬鞍形設計使電纜易于固定。

**Material:** UL approved Nylon 66,94V-2.

**Application:** Saddle design provide maximun stability to wire bundles. To apply, simply fix mount screw and secure wire bundles with nylon cabledties.



型號 ITEM NO.	高H	長L	寬W	帶孔T	固定孔B	包裝 Packing
HC-1	7	15	10	5	3	每包100PCS
HC-1S	5.8	12.8	7	4	3.3	
HC-2S	9	23	16	9	5	
HC-2	9	23	16	9	6	
HC-2L	9	23	16	9	6.5	



### 標牌式尼龍扎帶

材質：採用UL認可之尼龍66料制成，防火等級94v-2，耐酸，耐蝕，絕緣性良好，不易老化承受力強。

特點：扎帶前端設有空白標牌可用油性筆在上面標志記號。


### Marker Nylon Cable Ties

**Material:**nylon 66,94v-2 certificated by UL,heat-resisting.

**Usage:**it is easy to mark on the space at front tip of ties with oil pen.



編號 ITEM .NO.	長L		寬W MM	最大捆扎範圍 E BUNDLE DIAMETER MM	拉力 TENSILE STRENGTH		標牌尺寸 MM
	INCH	MM			LBS	KGS	
XT-4*100MT	4"	100	2.5	22	18	8.0	12*14
XT-5*110MT	4.4"	110	2.5	22	18	8.0	13*20
XT-4*150MT	6"	150	3.0	32	40	18	15*25
XT-5*200MT	8"	200	3.0	42	40	18	15*25





### 膨脹管 PLASTIC ANCHOR

名稱：膨脹管 **Name: PLASTIC ANCHOR**  
 材質：PE、PP **Material: PE、PP**  
 顏色：白、灰、特殊顏色歡迎訂做 **Color: White, gray, special colors welcome to order**



型號 ITEM NO.	長度 Length (mm)	外徑 Out diameter (mm)	內徑 Inside diameter (mm)	包裝 PACKING
XT-05	25.0	5.0	4.5	100PCS
XT-06	30.0	6.0	4.9	
XT-07	35.0	7.0	5.3	
XT-08	40.0	8.0	5.3	
XT-10	50.0	10.0	5.8	
XT-12	60.0	12.0	6.3	
XT-14	60.0	14.0	7.5	

### 瓷磚定位十字架 TILE SPACER

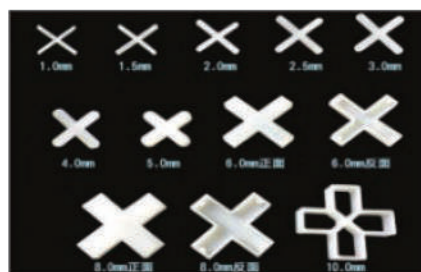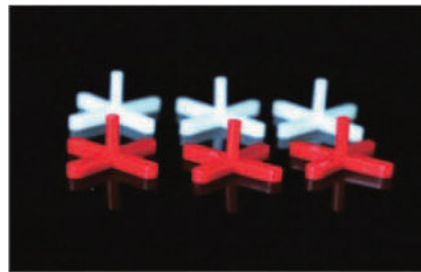

尺寸 Size	規則型 Regular type (L*W*H/mm)	中型 Regular type (L*W*H/mm)	長款 Long type (L*W*H/mm)
1.0mm tile spacer	21*1.0*2.0	23*1.0*2.5	27*1.0*3.0
1.5mm tile spacer	21*1.5*2.0	23*1.5*2.5	27*1.5*3.0
2.0mm tile spacer	21*2.0*2.0	23*2.0*2.5	27*2.0*3.0
2.5mm tile spacer	21*2.5*2.0	23*2.5*2.5	27*2.5*3.0
3.0mm tile spacer	21*3.0*2.0	23*3.0*2.5	27*3.0*3.0
4.0mm tile spacer	21*4.0*2.0	23*4.0*2.5	27*4.0*3.0
5.0mm tile spacer	21*5.0*2.0	23*5.0*2.5	27*5.0*3.0
6.0mm tile spacer	29*6.0*2.0	—	27*6.0*3.0
8.0mm tile spacer	29*8.0*2.0	—	—
10.0mm tile spacer	29*10.0*2.0	—	—

### 瓷磚找平器 TILE LEVEING SYSTEM

名稱：膨瓷磚找平器  
 材質：PE  
 顏色：白、灰、特殊顏色歡迎訂做  
**Name: TILE LEVEING SYSTEM**  
**Material: PE**  
**Color: White, gray, special colors welcome to order**

型號 ITEM NO.	重量 Weight (g)	瓷磚厚度 Tile thickness	間隙 Tile gap (mm)	包裝 PACKING
XT-0.8MM	345	3MM-14MM	0.8MM	100PCS
XT-1.0MM	350	3MM-14MM	1.0MM	
XT-1.5MM	360	3MM-14MM	1.5MM	
XT-2.0MM	365	3MM-14MM	2.0MM	
XT-3.0MM	370	3MM-14MM	3.0MM	

### 瓷磚找平器 TILE LEVEING SYSTEM

名稱：膨瓷磚找平器  
 材質：PE  
 顏色：白、灰、特殊顏色歡迎訂做  
**Name: TILE LEVEING SYSTEM**  
**Material: PE**  
**Color: White, gray, special colors welcome to order**

型號 ITEM NO.	重量 Weight (g)	瓷磚厚度 Tile thickness	間隙 Tile gap (mm)	包裝 PACKING
XT-1.0XL	400	12MM-14MM	1.0XL	100PCS
XT-1.5XL	410	12MM-14MM	1.5XL	
XT-2.0XL	420	12MM-14MM	2.0XL	
XT-3.0XL	430	12MM-14MM	3.0XL	
XT-1.5MM	150	8MM-13MM	1.5MM	

### 汽車防滑扎帶

材質：尼龍改性材料制成，耐酸，耐蝕，不易老化。  
 特點：耐酸、耐腐蝕、抗張强度高，防滑耐磨，使用方便，適合於結冰路段和雪地。

### Automobile Anti Skid Strap

**Texture Of Material:** It is made of nylon modified material, acid resistant, corrosion resistant and not easy to aging.  
**Characteristic:** Acid resistance, corrosion resistance, high tensile strength, anti-skid and wear-resistant, easy to use, suitable for frozen road and snow.

編號 ITEM .NO.	長L		寬W MM	捆扎範圍 E BUNDLE DIAMETER MM	拉力 TENSILE STRENGTH	
	INCH	MM			LBS	KGS
XT-900AST	35 1/2"	900	9.0	251	175	80

